


# CONCLEAN ECCUA OLJEAVSKILJARE

## *med bypass, klass 1*

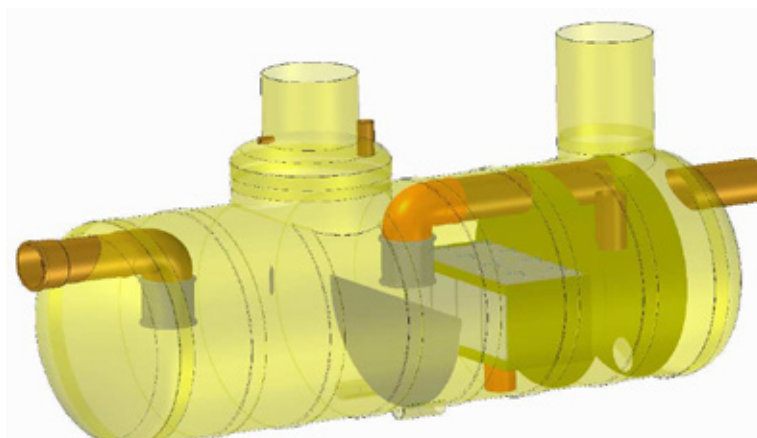

MAERIAL	VOLYM L/S	BYPASS VOLYM L/S	DIAMETER D	LÄNGD L	INLOPPSRÖR MM
PE	3	9	1200	2200	160
PE	6	18	1200	2500	200
GRP	10	30	1200	2730	250
GRP	15	45	1600	3340	315
GRP	20	60	1600	3840	315
GRP	30	90	1600	4730	315
GRP	40	120	1800	5800	400
GRP	50	150	1800	6800	400
GRP	65	195	2000	7930	500

CE testad och godkänd  
enligt EN: 858-1:2002

### Medföljer:

Inlopp/utloppsrör

Plastlock

Graf teleskopsbetäckning  
till 3-6 l/sek

Inbyggd coalisator med  
stålramar i rostfritt stål

### *Tillval*



Gjutjärnsbetäckning  
D600 40t



Labko  
oljenivåalarm

### **Kontakt**

Växel: 010-210 30 30  
info@conclean.se  
service@conclean.se  
www.conclean.se