

CONCLEAN ECCUA OLJEAVSKILJARE

klass 1



CE testad och godkänd
enligt EN: 858-1:2002

MAERIAL	VOLYM L/S	DIAMETER D	LÄNGD L	STOS	INLOPPSRÖR MM
PE	1,5	1200	2000	600	110
PE	3	1200	2200	600	110
PE	6	1200	2500	600	160
GRP	10	1200	3200	600/200	160
GRP	15	1600	3340	600/200	200
GRP	20	1600	3840	600/200	200
GRP	30	1600	4730	600/200	250
GRP	40	1800	5800	600/200	315
GRP	50	1800	6800	600/200	315
GRP	65	2000	7930	600/200	315


Medföljer:

Inlopp/utloppsrör

Plastlock

Graf teleskopsbetäckning
till 3-6 l/sek

Inbyggd coalisator med
stålramar i rostfritt stål

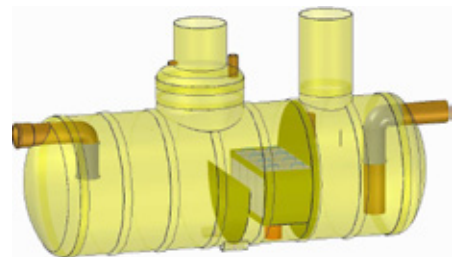

Tillval



Gjutjärnsbetäckning
D600 40t



Labko
oljenivåalarm

Kontakt

Växel: 010-210 30 30
info@conclean.se
service@conclean.se
www.conclean.se